
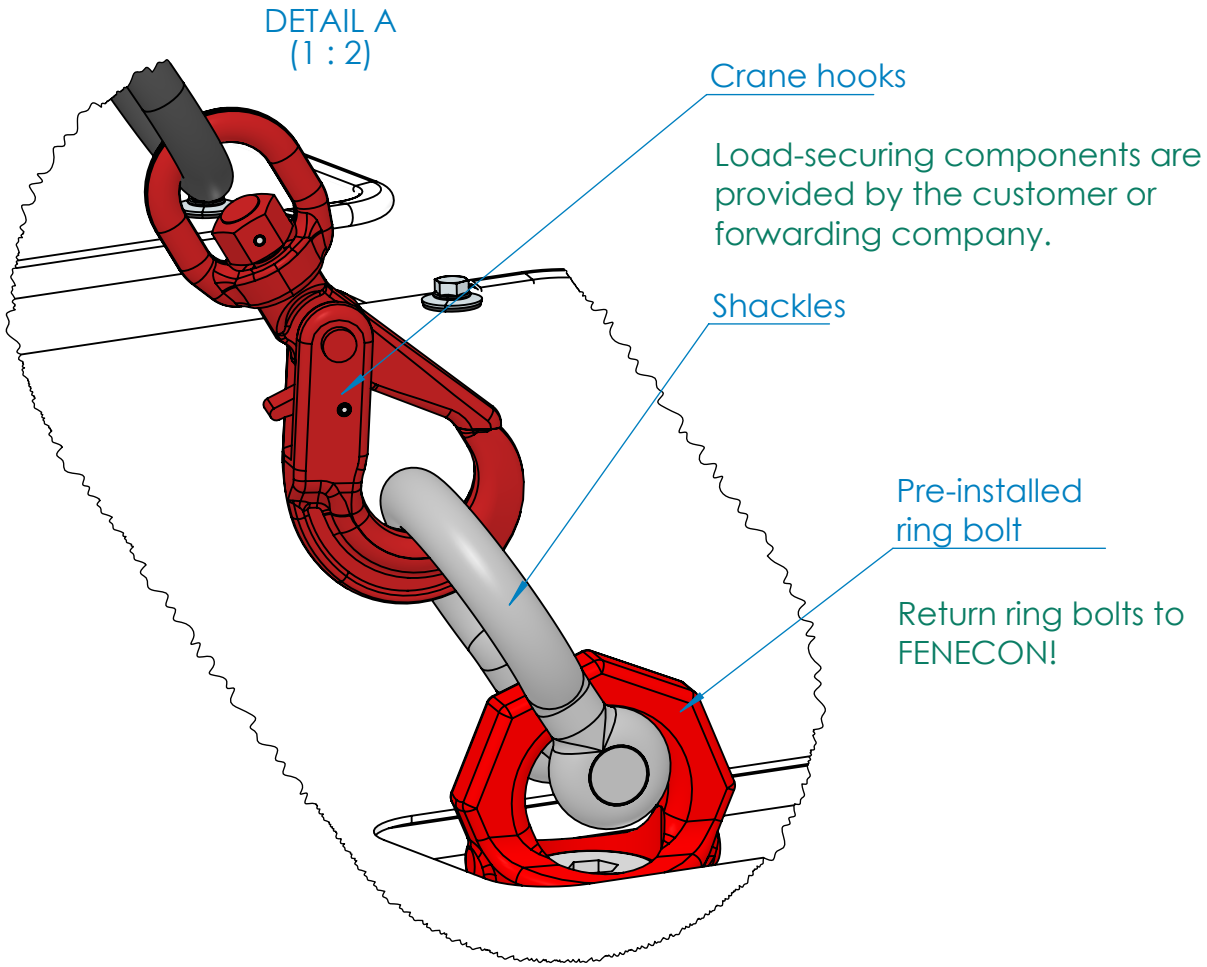


Caution! Ensure that all components have sufficient load-bearing capacity! Observe all information provided by the respective manufacturer! Observe the total weight of the lifting configuration!

Caution! Riggers must have received specialized training! Obey the permissible working radius of the crane in the given case and consider all ambient conditions!

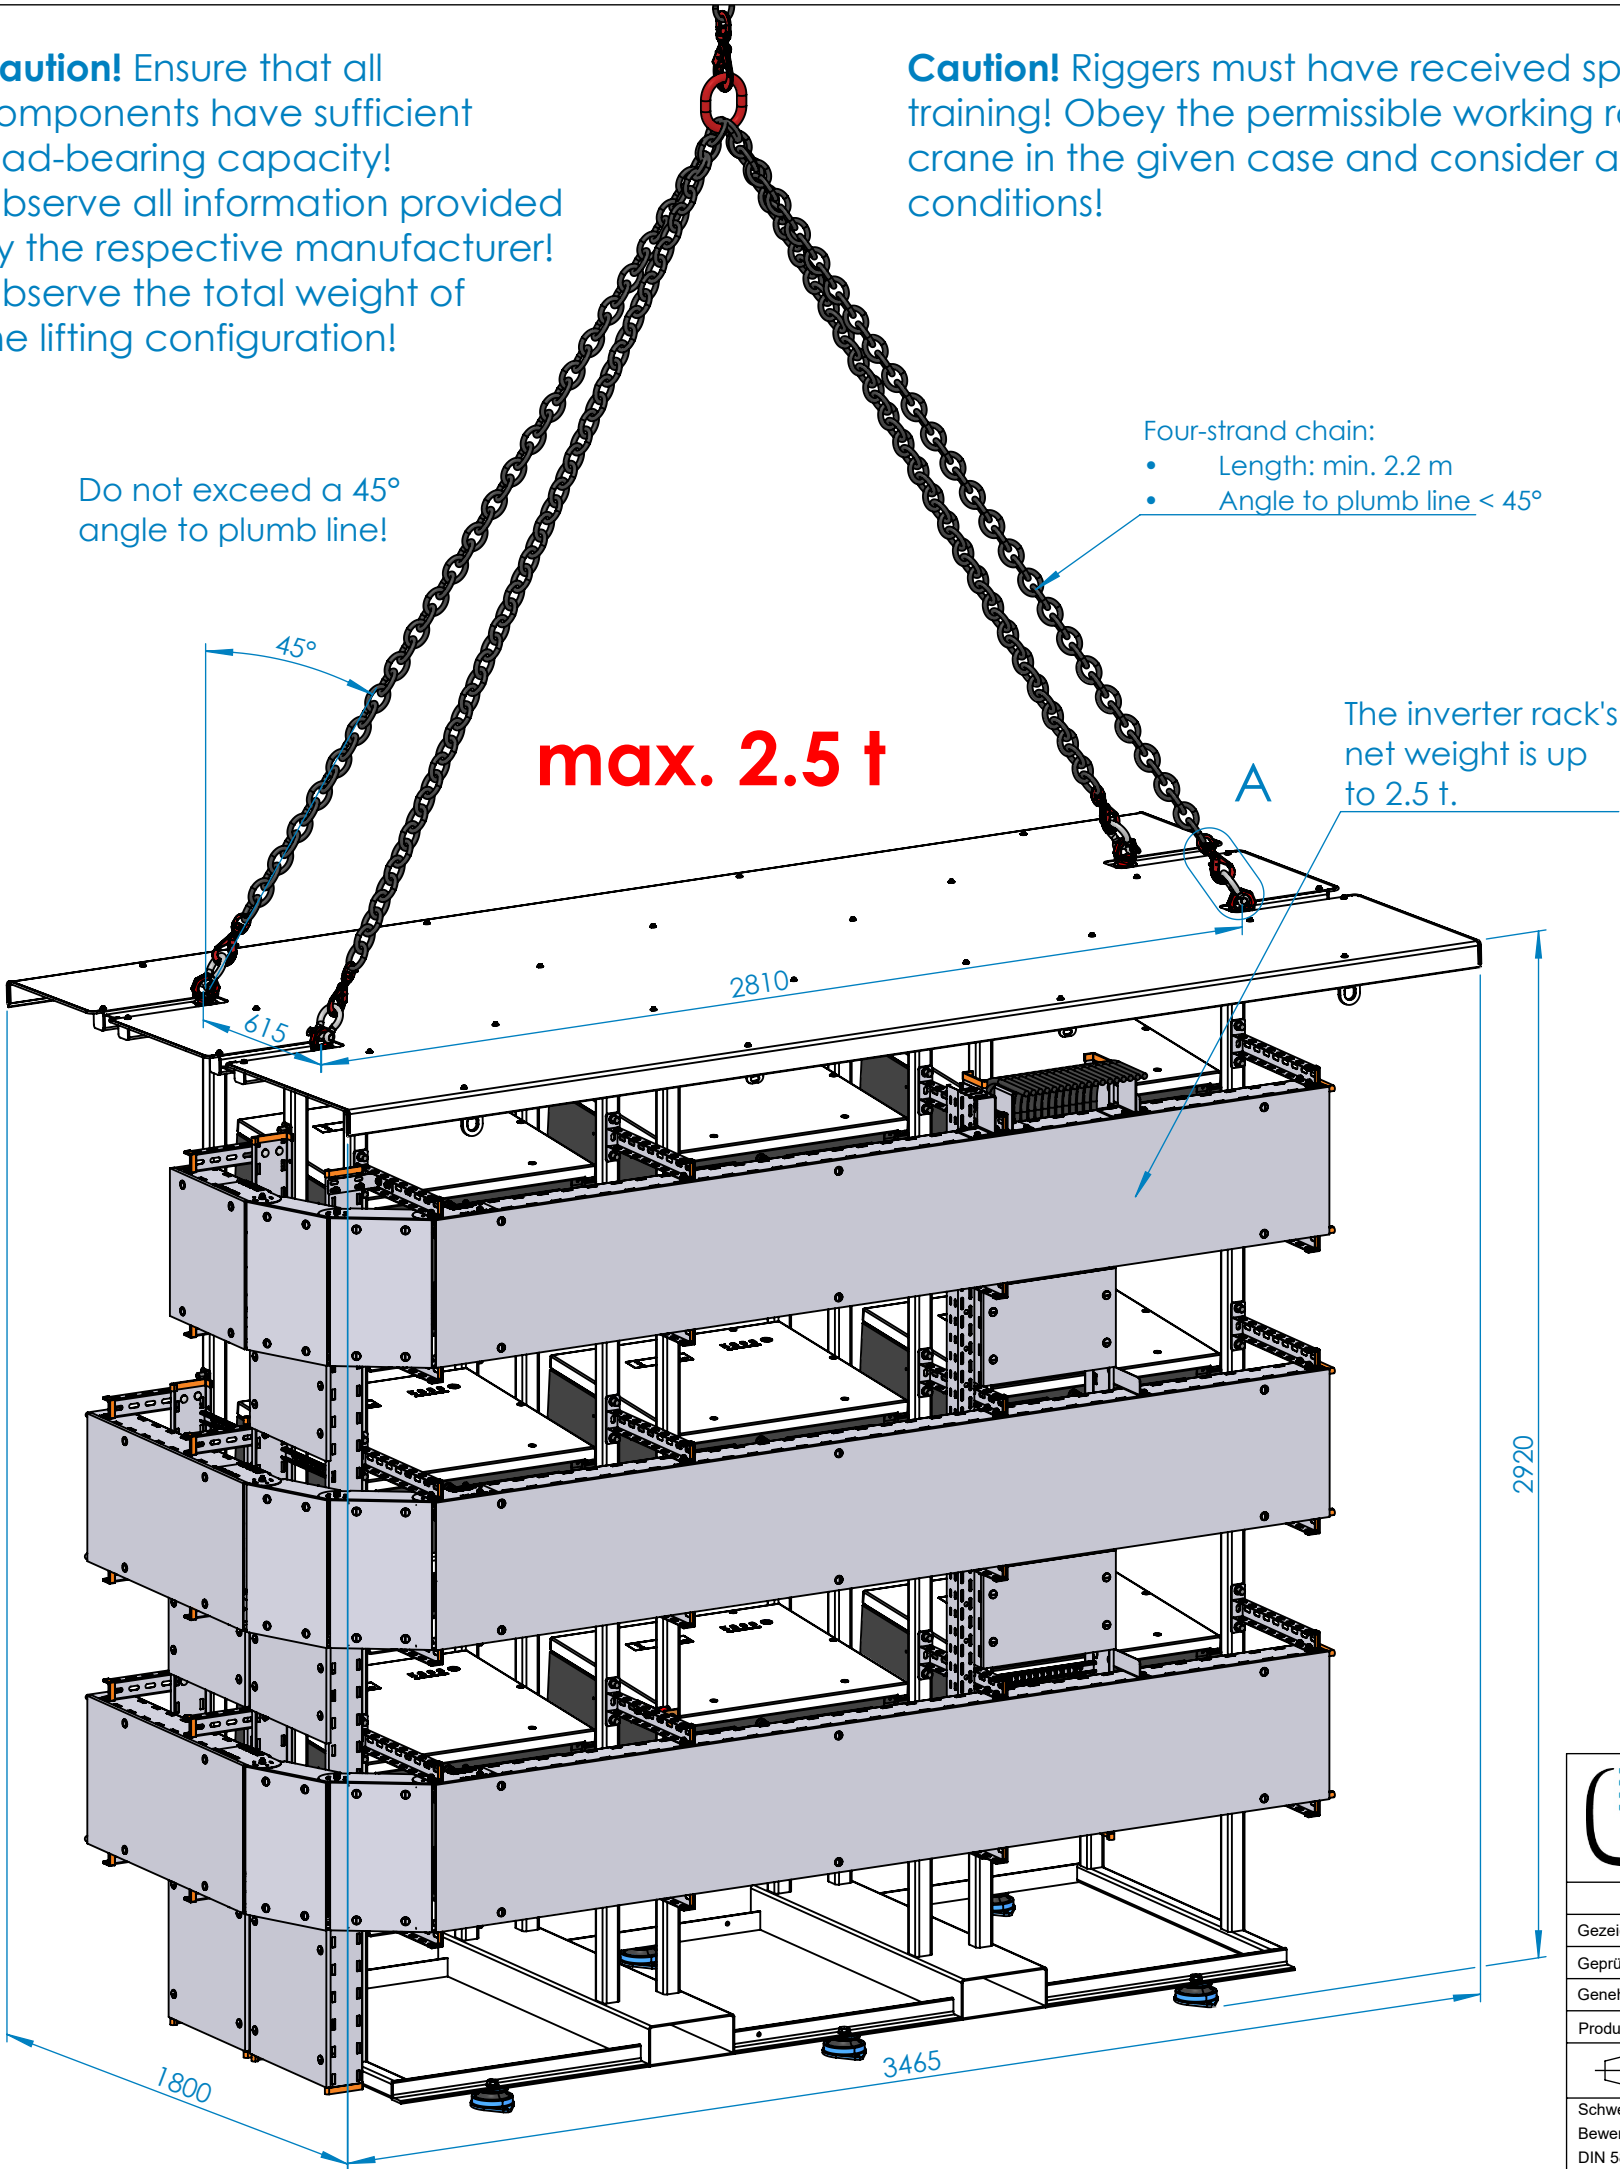

		FENECON GmbH Gewerbepark 6 94547 Iggenbach Deutschland		Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Zustimmung nicht vervielfältigt oder an Drittpersonen sowie Wettbewerber weitergegeben werden.	
	Name	Signatur	Datum	Zeichnungsnummer: INW-501-01	
Gezeichnet	JOSEF.SCHWARZHUBER		24.06.2025	Titel: Lifting instructions - inverter rack (Crane)	
Geprüft	ANTONIO.LOVRIC		24.06.2025		
Genehmigt	DANIEL.BIRKENEDER		24.06.2025		
Produktion					
		Allgemeintoleranz: ISO 2768-mK	Maßstab: 1:20	Projekt: Industrial XL WR-Gestell	A3
Schweißgüte: Bewertungsgruppe B DIN 5817		Allgemeintoleranzen für Schweißkonstruktionen:	Material: -	ERP-Nummer: -	
		EN ISO 13920	Gewicht: max. 2,5t		
		Toleranzklasse BF	Oberfläche: -		
		Kanten DIN ISO 13715			