

1. Ensure that all components have sufficient load-bearing capacity! Observe all information provided by the respective manufacturer!
2. Riggers must have received specialized training!
3. For transport, all degrees of freedom of the container must be secured appropriately in all directions!
4. Adhere to the applicable load safety regulations!
5. Only carry the inverter rack as closed transport!


max. 2.5 t

Slings:

- Length: min. 3.8 m
- Angle to plumb line: approx. 45°


Use 4 x timber supports with anti-slip mats (min. height = 70 mm).
Vibration dampers must not touch the transport platform!



DETAIL A
(1 : 2)

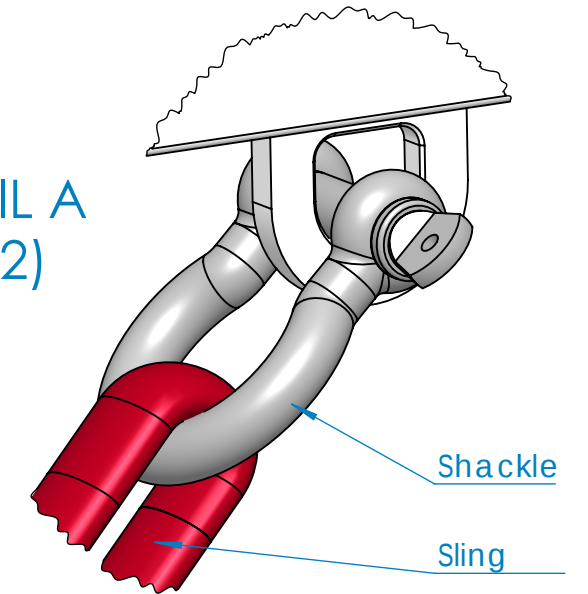

Cargo-securing components are provided by the customer/forwarding company.

DETAIL B
(1 : 2)

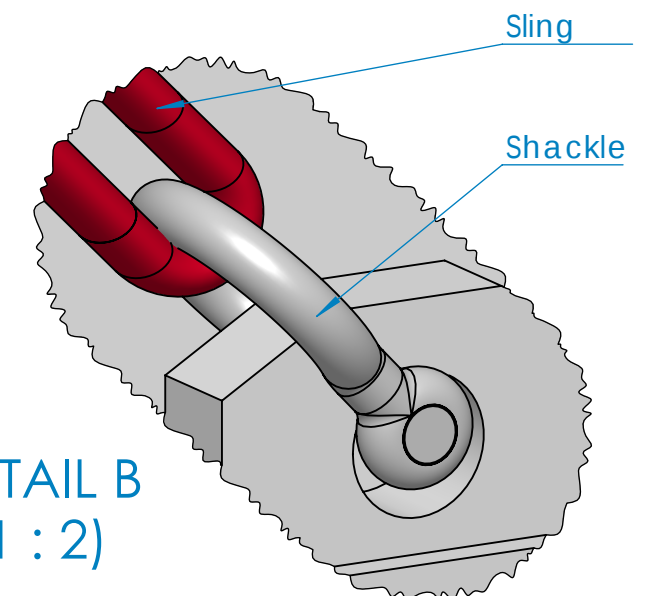

 FENECON		FENECON GmbH Gewerbepark 6 94547 Iggensbach Deutschland		Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Zustimmung nicht vervielfältigt oder an Drittpersonen sowie Wettbewerber weitergegeben werden.	
	Name	Signatur	Datum	Zeichnungsnummer: INW-502-01	
Gezeichnet			29.09.2025	Titel: IXL Inverter Rack Transport Instructions	
Geprüft			29.09.2025		
Genehmigt			29.09.2025		
Produktion					
		Maßstab: 1:20		Projekt: Industrial XL WR-Gestell	
		Material: -		ERP-Nummer: -	
		Gewicht: max. 2,5 t			
		Oberfläche: -			
A3					