

Caution!

1. Ensure that all components have sufficient load capacity! Observe the manufacturer's specifications!
2. For transport, all degrees of freedom of the container must be secured appropriately in all directions!
3. Adhere to the applicable load safety regulations!

Caution!


The transport rails must only be used to tie the container down to the transport platform, NOT for lifting the container!

Caution!

The fully-equipped container incl. its bottom frame weighs up to 11t.

Caution! Do not loop slings directly through the rails. Sharp edges may damage or cut the slings. Use hooks or shackles!

DETAIL A
(1 : 5)

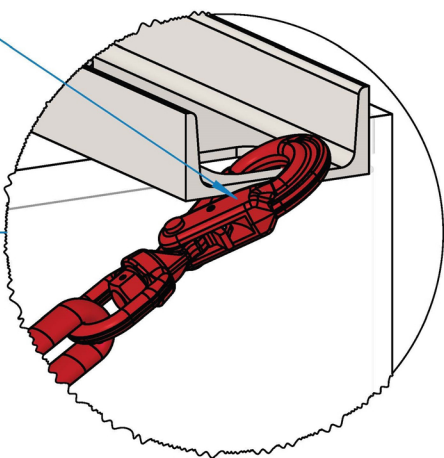


Caution!

Use slings to avoid damage! Sheet metal housings must not be damaged!

Sling length: ca. 5500 to 6000 mm, depending on the transport vehicle's rigging points.

Secure the container additionally with slings perpendicular to the direction of travel!


DETAIL B
(1 : 5)

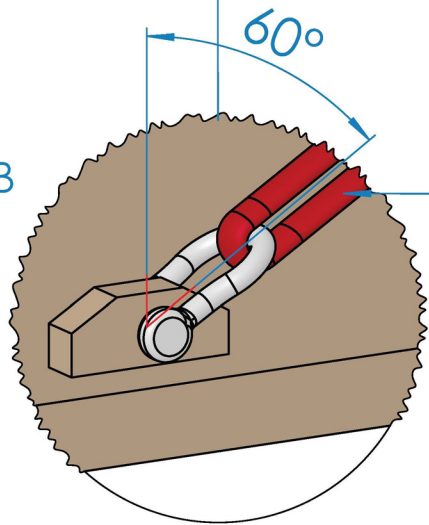

Caution!

Angle to plumb line should be approx. 60°

DETAIL C
(1 : 8)

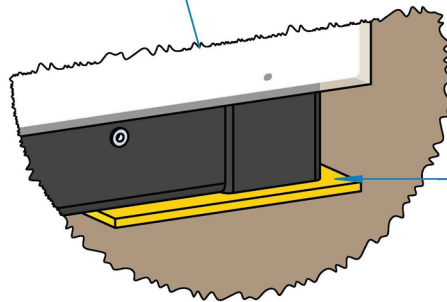

Place anti-slip mats below all four corners! Min. height: h = 25 mm