

Caution! Ensure that all components have sufficient load-bearing capacity! Observe all information provided by the respective manufacturer! Observe the total weight of the lifting configuration!

Caution! Riggers must have received specialized training! Obey the permissible working radius of the crane in the given case and consider all ambient conditions!

- Four-strand chain:
- Length: min. 4.3 m
 - Angle to plumb line < 45°

DETAIL A
(1 : 3)


Chain slings/lifting accessories are provided by the customer or the crane company.

Four-strand chain

Container lifting lugs (45°): e. g. Mitari 270.MKAX (WLL = 16 t, left and right versions). Follow the instructions provided by the manufacturer!

Return hoist rings to FENECON!

The fully-equipped container's net weight is up to 35 t.

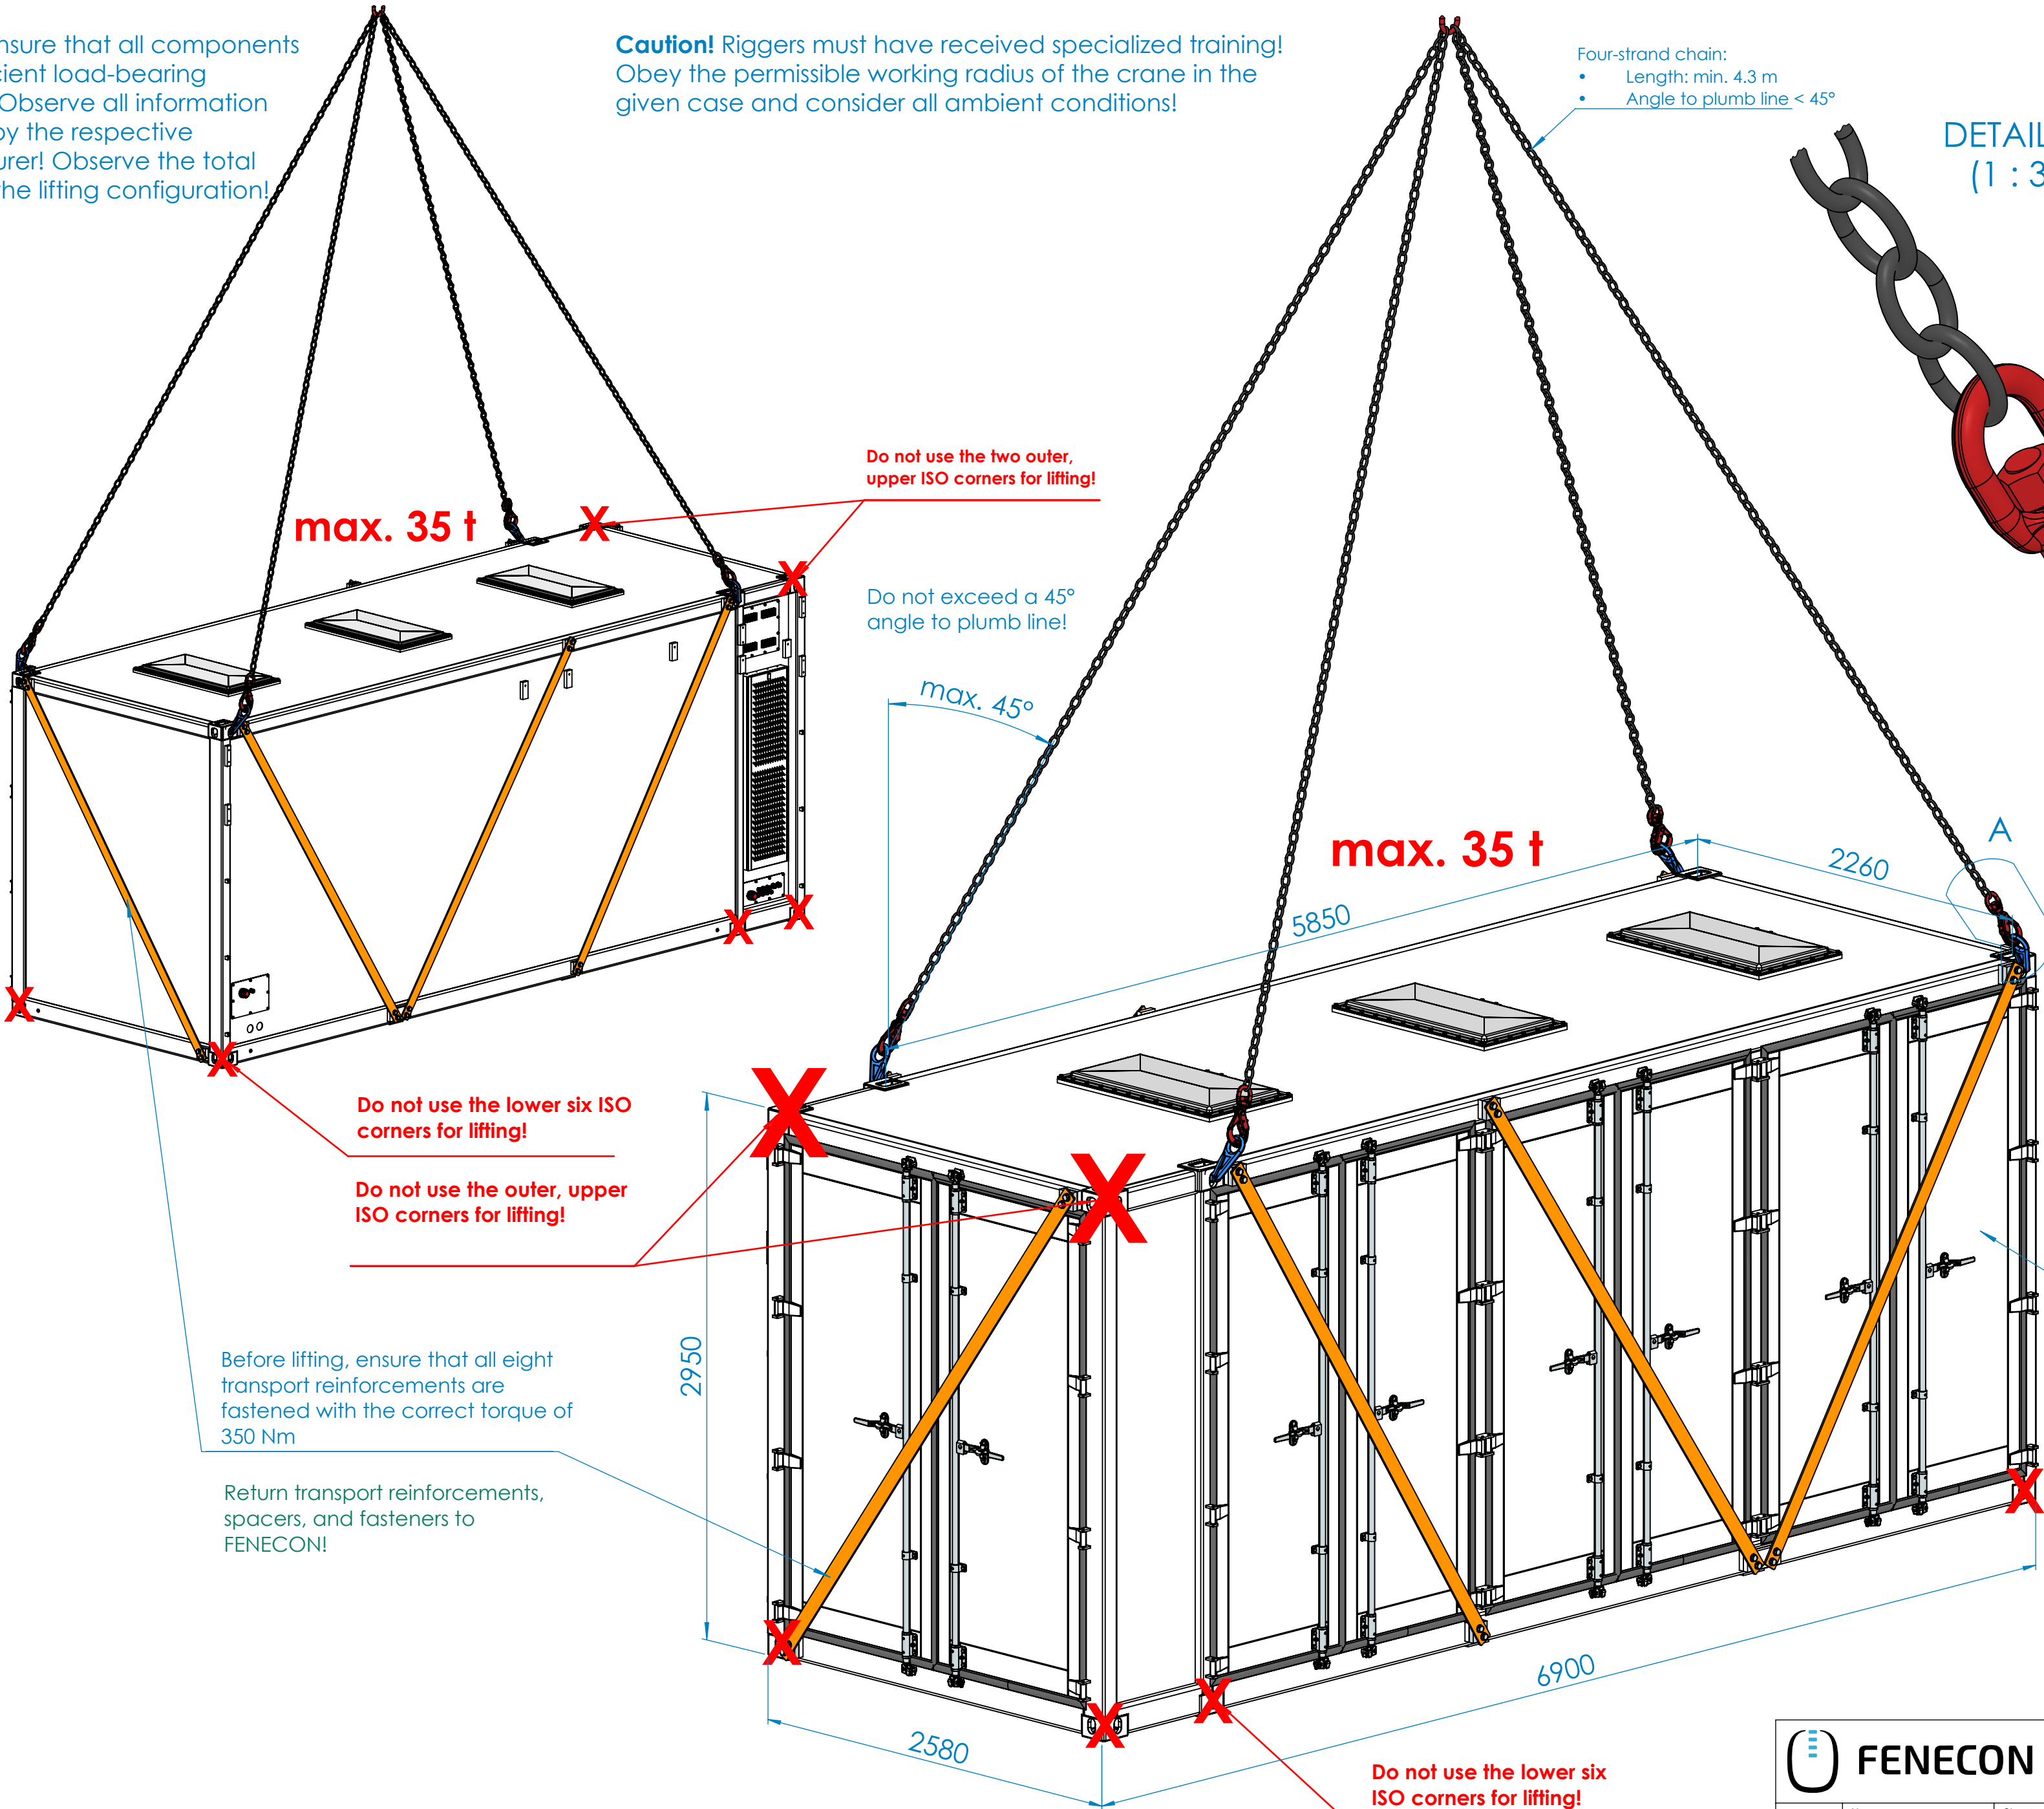

		FENECON GmbH Gewerbepark 6 94547 Iggersbach Deutschland		Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Zustimmung nicht vervielfältigt oder an Drittpersonen sowie Wettbewerber weitergegeben werden.	
	Name	Signatur	Datum	Zeichnungsnummer: IXL-217-01-02	
Gezeichnet	JOSEF SCHWARZHUBER		29.09.2025	Titel: LIFTING INSTRUCTIONS (CRANE)	
Geprüft	ANTONIO LOVRIC		29.09.2025		
Genehmigt	DANIEL BIRKENEDER		06.10.2025		
Produktion				Projekt: Industrial XL	
	Allgemeintoleranz: ISO 2768-mK		Maßstab: 1:25	ERP-Nummer: -	
	Allgemeintoleranzen für Schweißkonstruktionen:		Material: -		
	EN ISO 13920		Gewicht: max. 35t		
Bewertungsgruppe B	Toleranzklasse BF		Oberfläche: -	A2	
DIN 5817	Kanten DIN ISO 13715				